



RECOMMENDED P.C.B LAYOUT (TOP VIEW)  
TOLERANCES: ±0.10mm



parts no.	DIM. a	DIM. b	inner thread
B,C	4.8	11.8	4#40
D,E	5.8	12.0	4#40

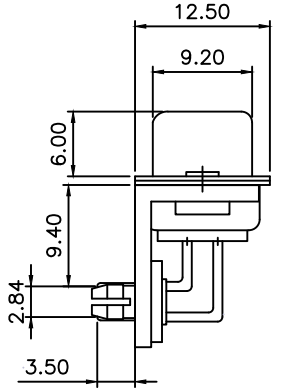

SPECIFICATION  
 MATERIAL  
 Insulator: PBT & GLASS FILL REINFORCED UL-94V-0  
 Contacts: Brass  
 Shell: Steel  
 Rivet,Boardlock: Copper alloy  
 CONTACT PLATING  
 Gold flash  
 ELECTRICAL  
 Operation voltage: 250 VAC max.  
 Current rating: 3 Amps max.  
 Contact resistance: 15 mohms max.  
 Insulation resistance: 3000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1000 VAC / minute  
 Operating temperature: -55°C TO +105°C  
 Part no.

207 A E 09 M G P B G A 1  
 1 2 3 4 5 6 7 8 9 10 11

- SERIES NO.  
207 = D-SUB 7.2mmPCB  
RIGHT ANGLE MACHINED PIN  
(D-SUB,90度PC板型,車針)
- TYPE: A = Standard
- ENVIRONMENT PROTECTION  
MATERIA  
E = ROHS環保料件
- CONTACT NUMBER:  
09 = 09 PIN
- CONTACT TYPE:  
M = MALE (公)
- CONTACT AREA PLATING:  
G = Gold Flash(全金G/F)  
R = 3U" Gold(全金3U")  
A = 5U" Gold(全金5U")  
C = 15U" Gold(全金15U")  
D = 30U" Gold(全金30U")
- SHELL PLATING:  
P = TIN+DIMPLE (鍍錫壓花)
- BRACKET OPTION:  
B = PLASTIC/BRACKET (有塑膠腳架)
- RIVET & BOARDLOCK OPTION  
G = REAR RIVET W/BOARDLOCK(卯後殼Z片)  
H = REAR RIVET W/L-SHAPE (卯後殼L片)
- PARTS OPTION  
A = NON ACCESSORIES(無附件)  
B = LOOSE SCREWS 4.8\*11.8mm(附4.8\*11.8mm螺絲)  
C = FIXED SCREWS 4.8\*11.8mm(鑽4.8\*11.8mm螺絲)  
D = LOOSE SCREWS 5.8\*11.8mm(附5.8\*11.8mm螺絲)  
E = FIXED SCREWS 5.8\*11.8mm(鑽5.8\*11.8mm螺絲)
- INSULATOR COLOR  
1 = WHITE (白色)  
2 = BLUE (藍色)  
3 = BLACK (黑色)

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0.	±0.5
.0	±0.3
.00	±0.2

SCALE: AS SHOWN UNIT: mm

亮泰 (中国) 有限公司

DRAWN	AVA	07/10/04
CHECKED	WAN	07/10/04
APPROVED	CHEN	07/10/04

DRAWN NAME:  
D-SUB PCB RIGHT ANGLE MACHINED(D-SUB,90度插板)  
09PIN,MALE(公),9.4mm車針,全金,鐵支架,有檔板, 卯四爪Z片  
 PRODUCT NO. 208AE09MGPKA1  
 FILE NAME: 208AE09MGPKA1

REV.	DESCRIPTION	DATE
A	ECN-20040710001(TONY)	07/10/04