
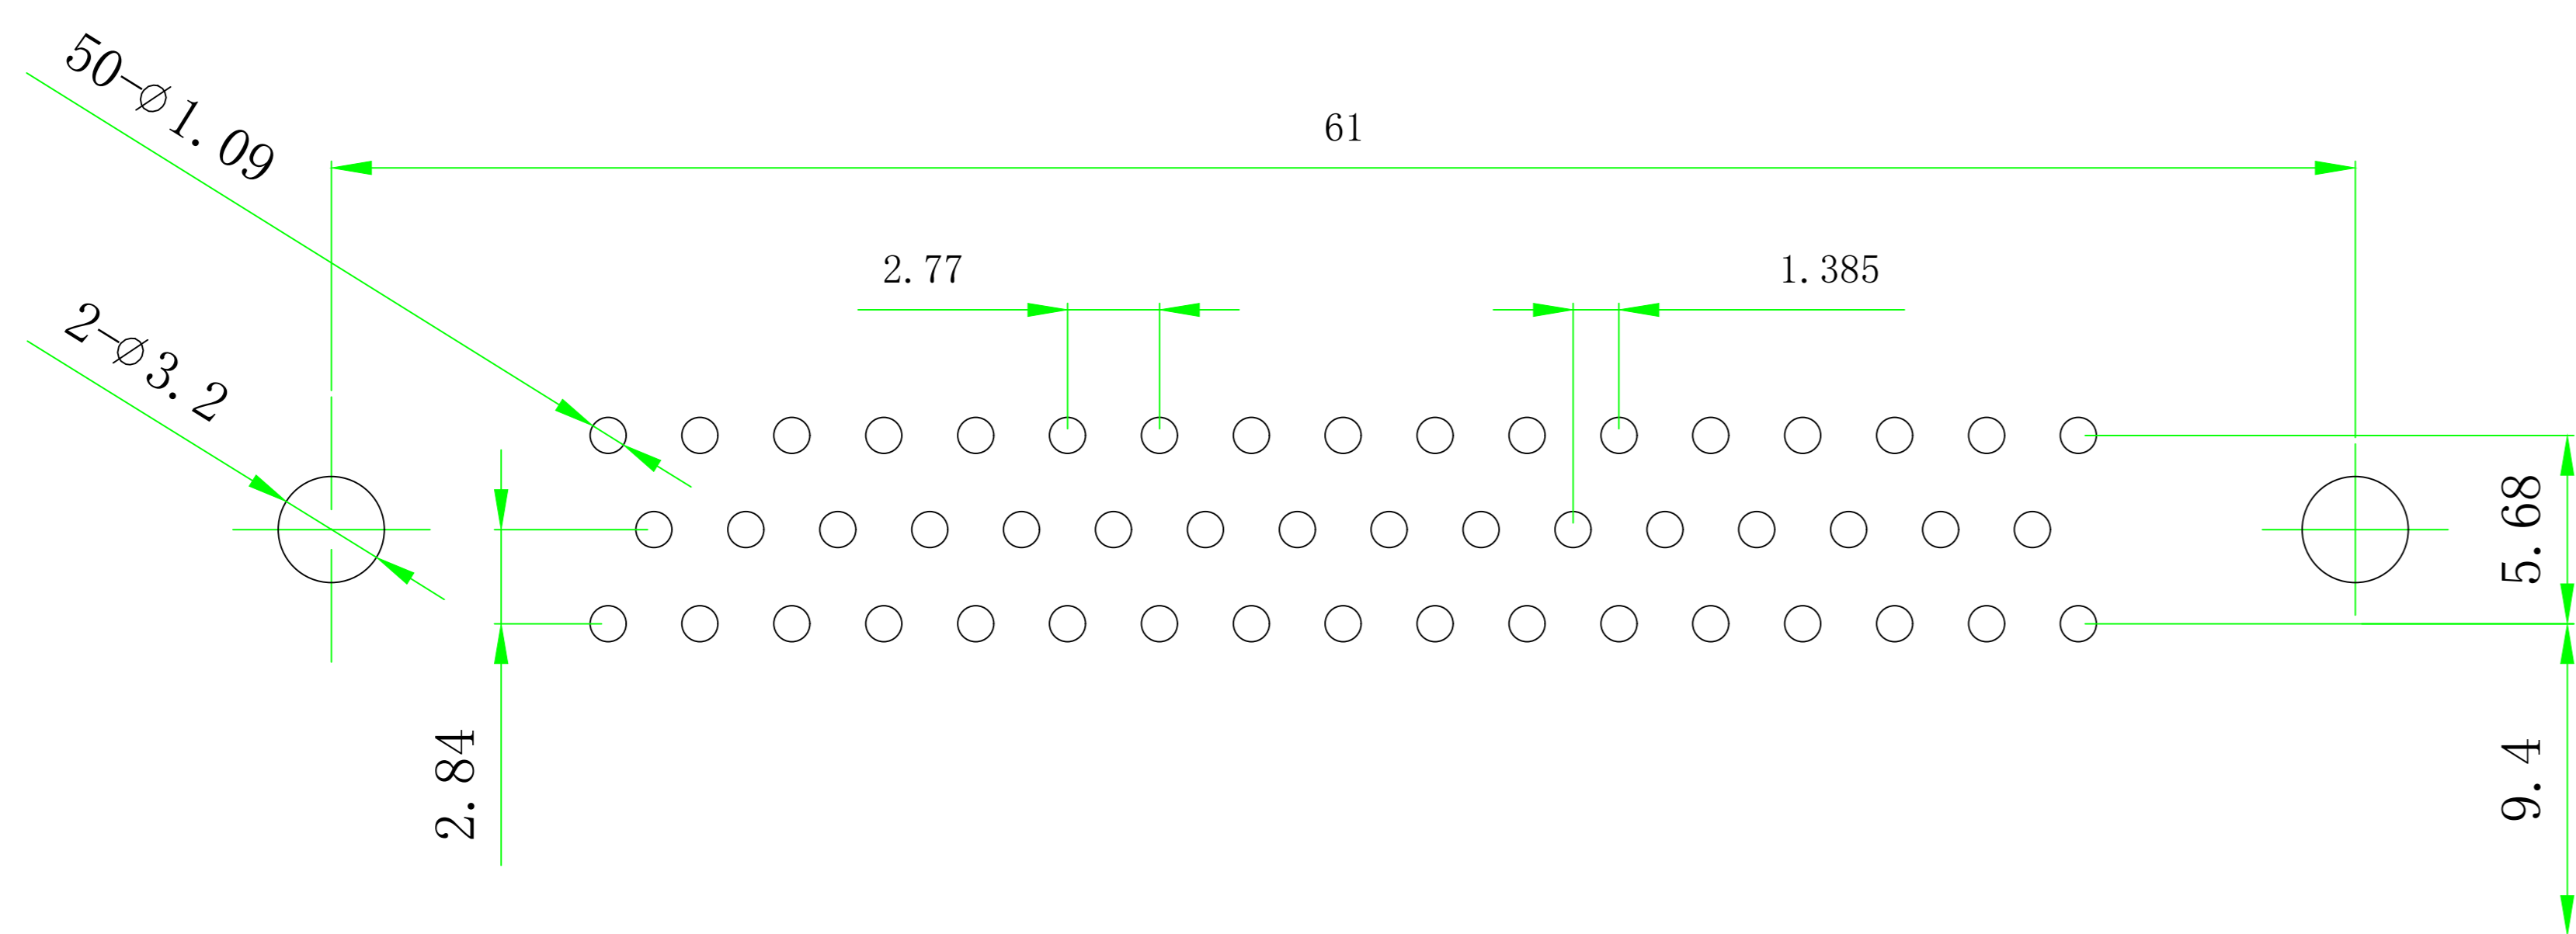
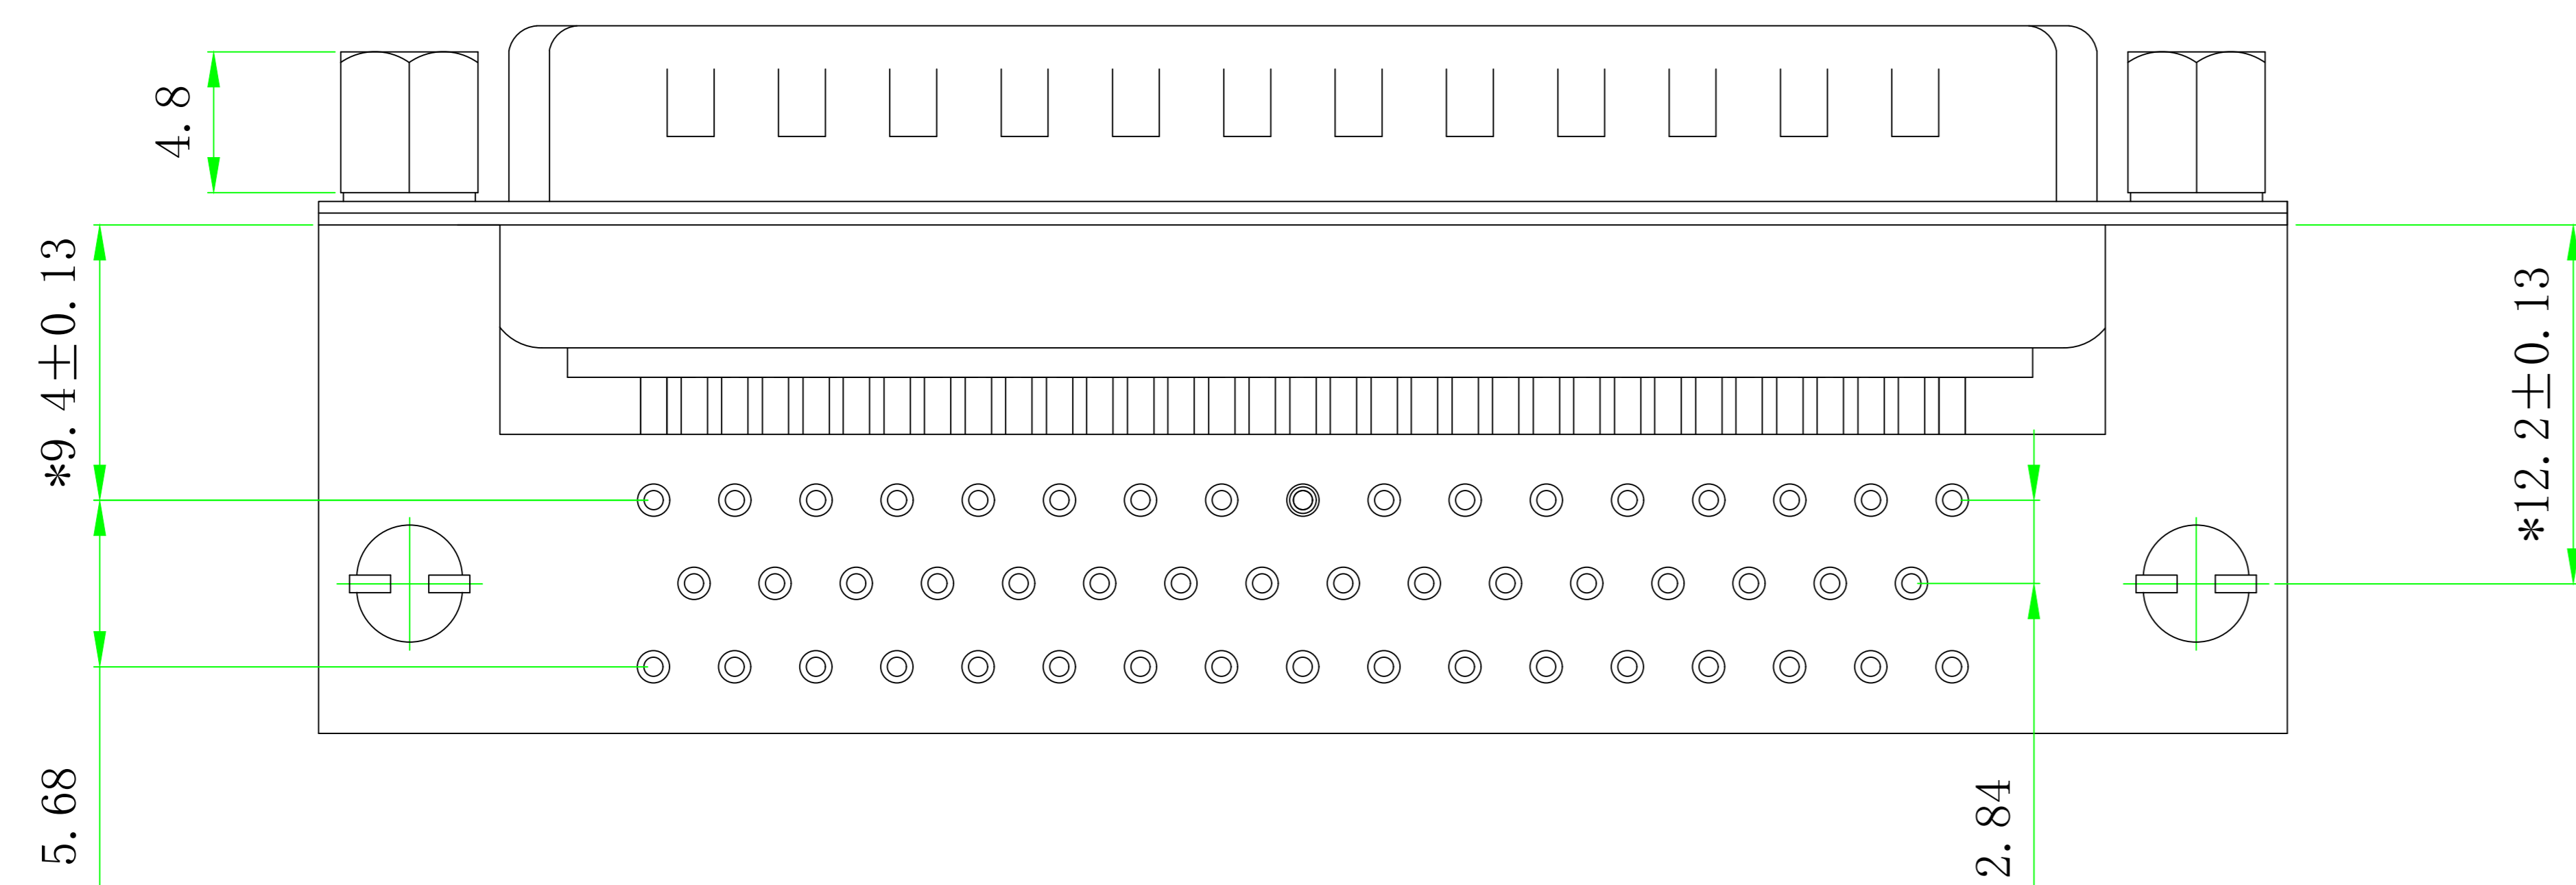
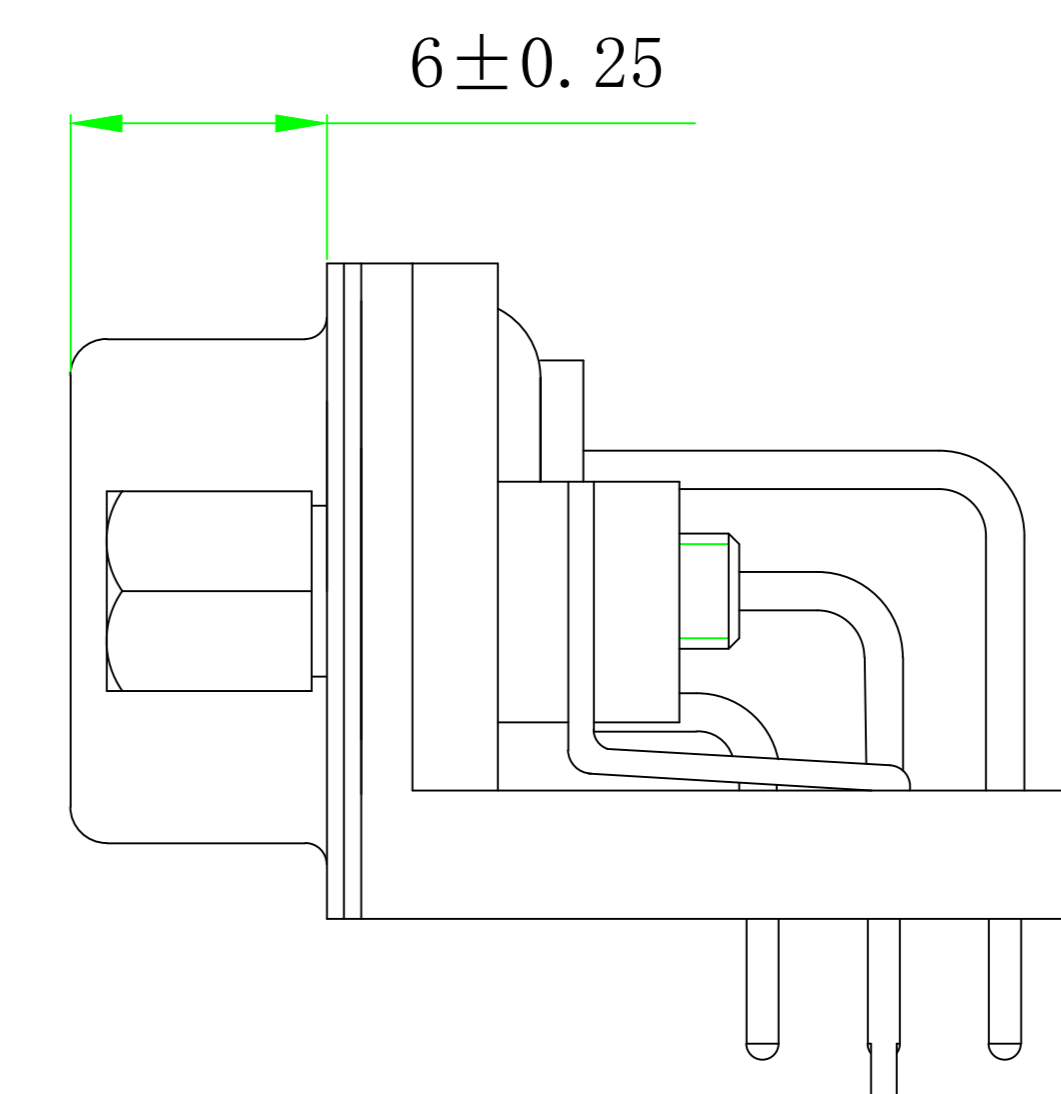


“\*” Pivot Dimension

RoHS Component

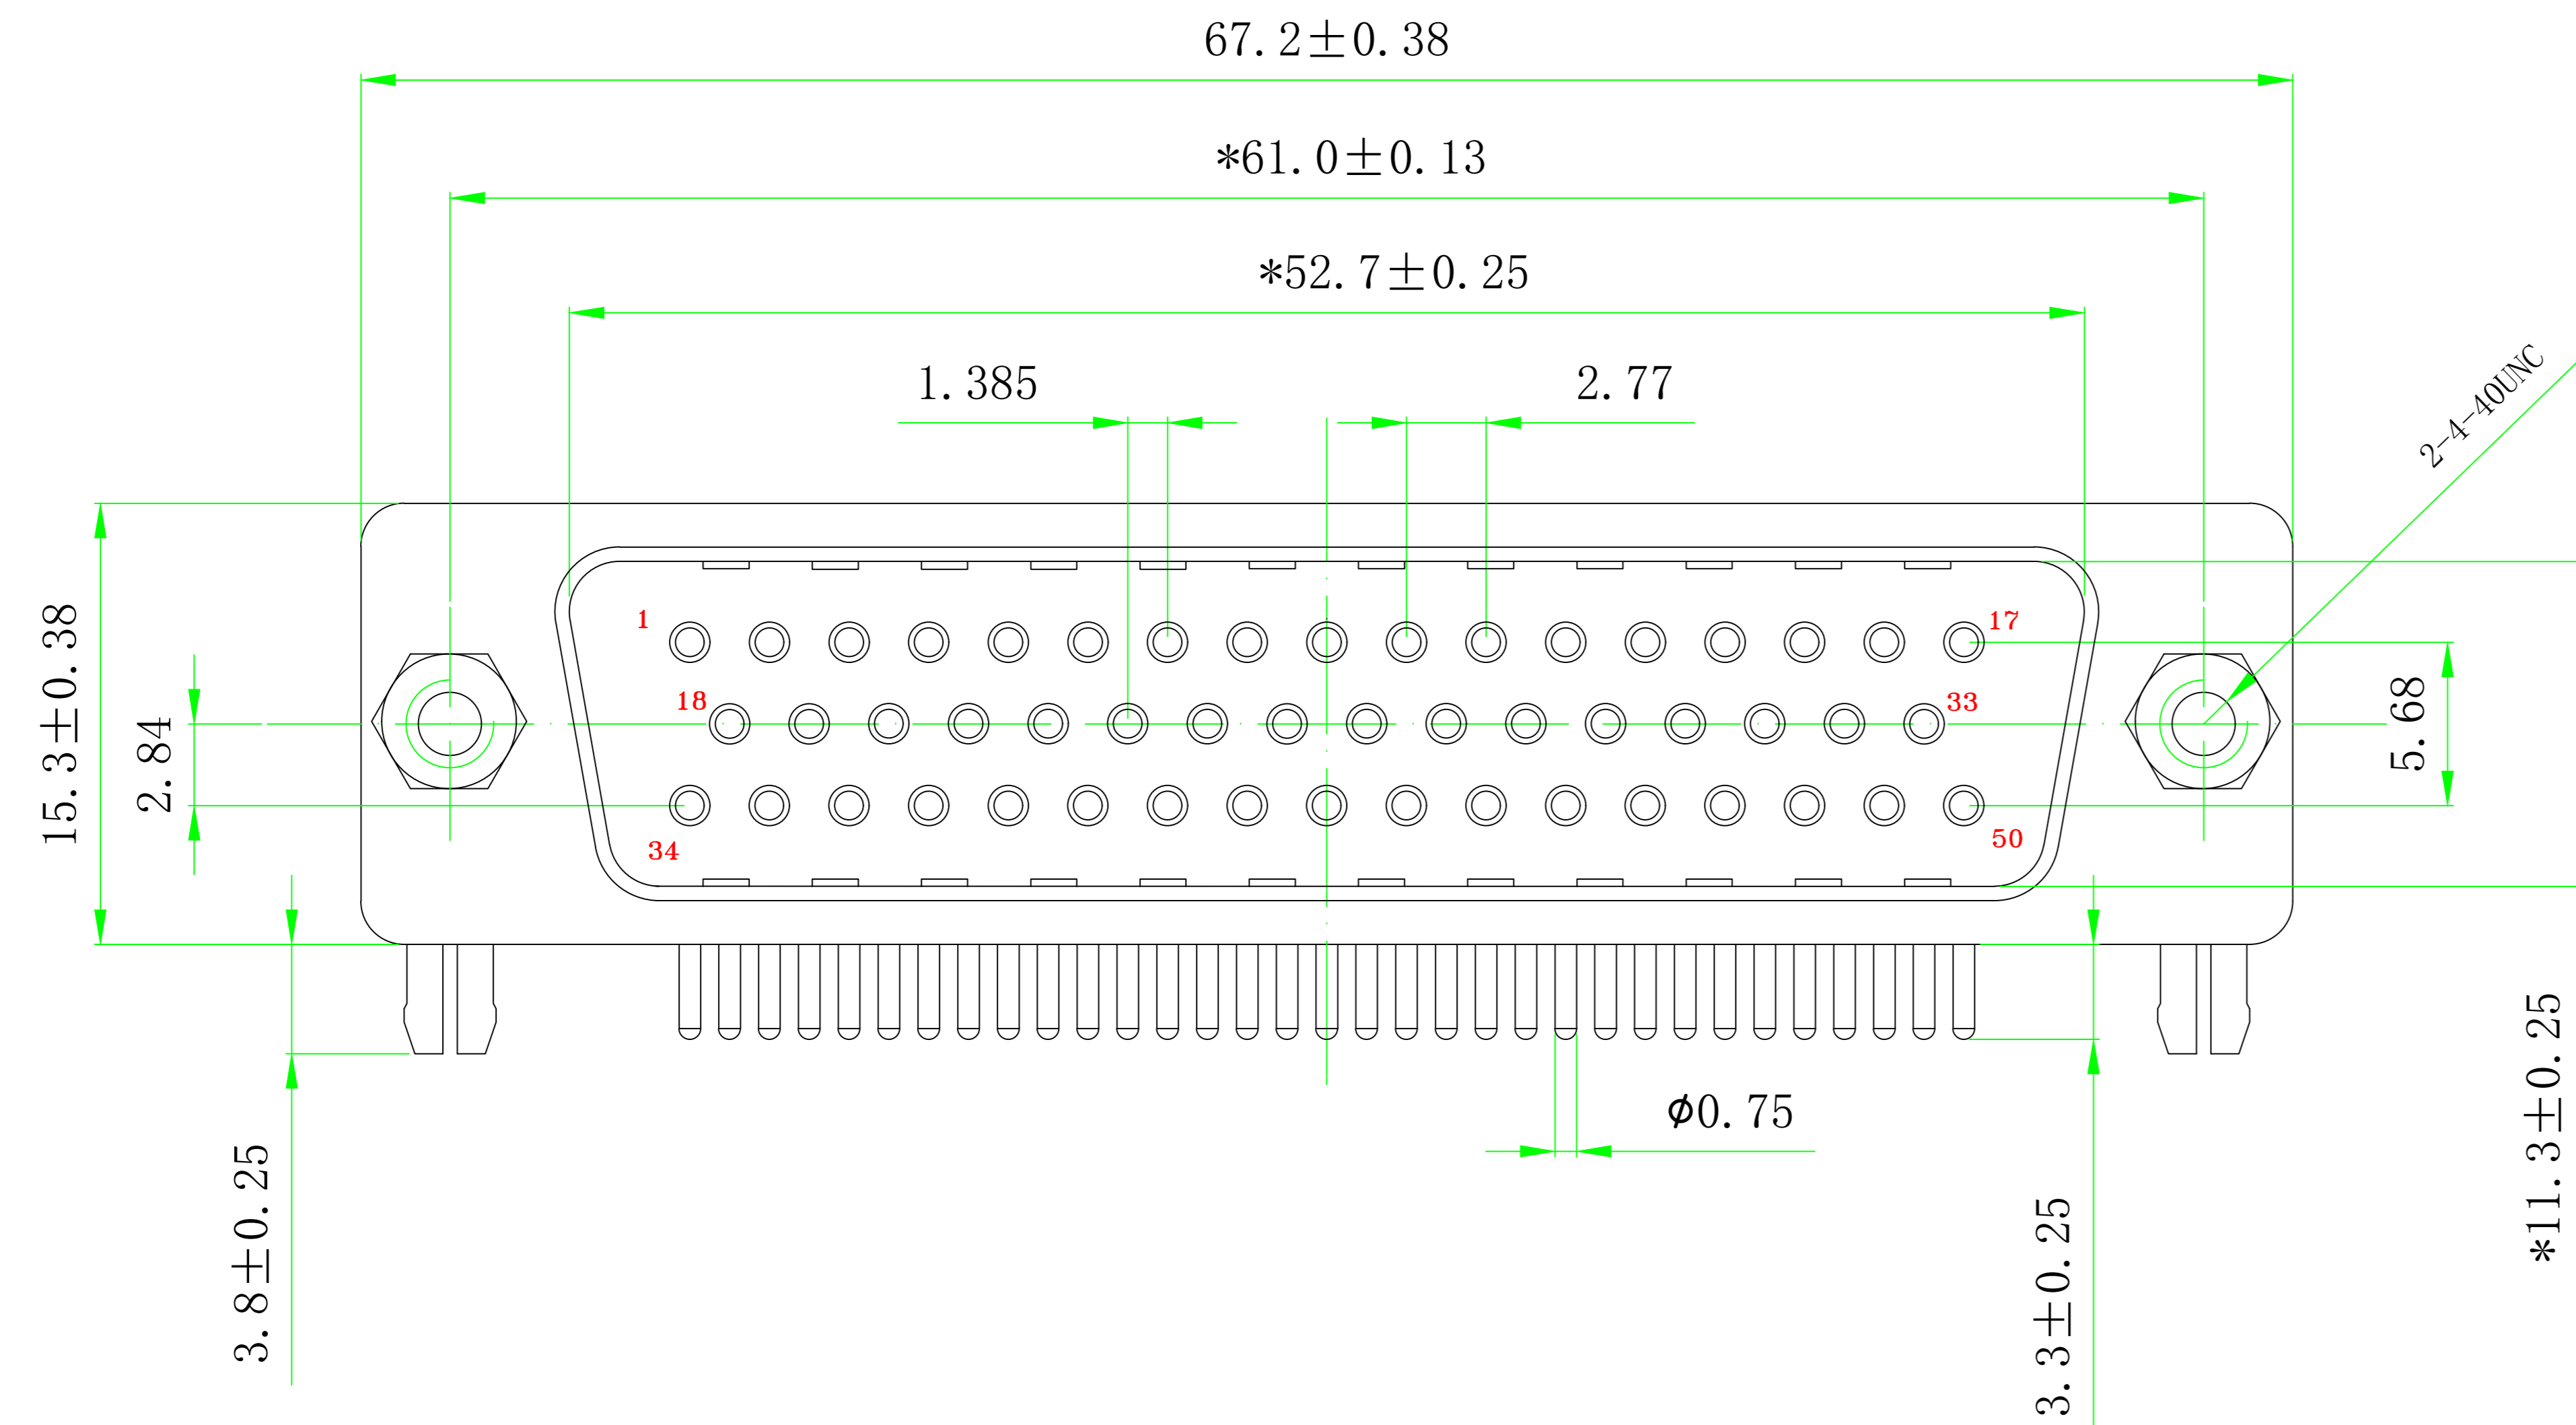

PCB LAYOUT

NOTICE :

1. ELECTRIC:

DIELECTRIC RATING: 300V

CONTACT CURRENT RATING: 5AMP

CONTACT RESISTANCE: 15mΩ MAX.

INSULATION RESISTANCE: 1000MΩ MIN. at 500V DC

DIELECTRIC STRENGTH: 500V AC RMS for 1Minute

OPERATION TEMPERATURE: -55C° ~125C°

2. MATERIAL:

INSULATOR: PBT+30% G. F (UL94V-0)

CONTACT: COPPER ALLOY

CONTACT PLATED: GOLD FIASH OVER NICKEL

SHELL: SPCC

SHELLPLATED: NICKEL/TIN

BRACKET: PBT+30% G. F (UL94V-0)

亮泰 (中国) 有限公司  
Lightany (China) Co., Ltd.

TOLERANCE: X. X ±0.38 X. XX ±0.25 X. XXX ±0.13 X. ° ±5° X. X° ±1°	DRAWN BY : 方翠燕	DATE : 2009. 11. 21	PART NAME: HDR 50P MALE 铆9.4 塑胶支架锁螺丝	
	CHECKED BY: H. CR	DATE : 2009. 11. 21	DRAW NO. XHY-06-0250	PART NO. PDR050MH1810092402094
UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 赵新桥	DATE : 2009. 11. 21	REMARK	MOLD NO.